


Kinghelm®

| REV | | REVISIONS | | |
|--------|-------------|-----------|-----|------|
| NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | DESIGN | | | |

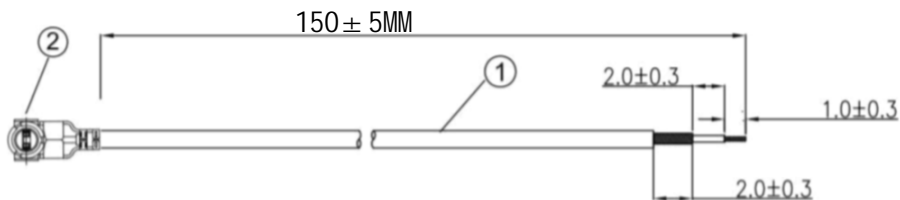

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|--------------------|------|
| | | | AS |
| ② | 接头 | 1代 IPEX端子 | 1 |
| ① | 同轴线 | RF1.37黑线,OD:1.37mm | AS |

深圳市金航标电子有限公司

www.kinghelm.com.cn

KHA-(RG1.37)-TX150-IPEX-221

0755-28190160

| | | | | |
|----------------------------------|-------|------|------|------------|
| ALL DIMENSION ARE IN MM | DRAWN | Jamy | DATE | 2020-06-15 |
| | ENG. | | | |
| COMPUTER GENERATED IN SOLIDWORKS | MFG. | | | |
| | Q.A. | | | |

| | | | | |
|------------|------------------------------|------|-------|----------------|
| PROJECTION | GENERAL TOLERANCE FOR ANGLES | XX | X,XX | X,XXX |
| | | ± 1° | ± 0.3 | ± 0.25 ± 0.150 |

| | | | |
|--------|--------|------|--------------|
| SIZE | Number | REV | A |
| SCALE: | Free | TYPE | SHEET 1 OF 1 |

CUSTOMER PIN:

