


PCB LAYOUT

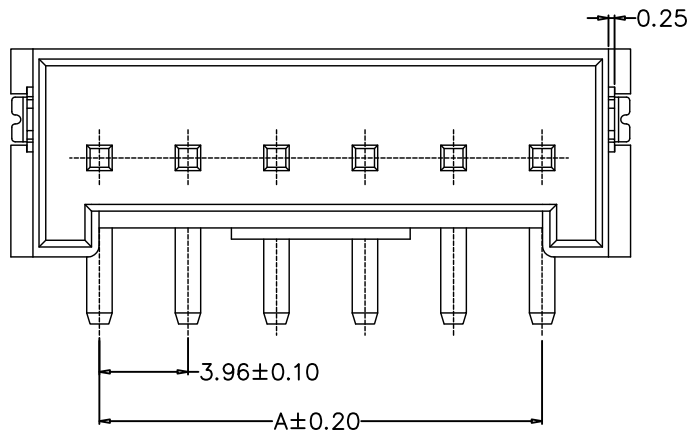

编 号	尺寸 (mm)		
	A	B	C
A3961-02AB	3.96	9.90	11.88
A3961-03AB	7.92	13.86	15.84
A3961-04AB	11.88	17.82	19.80
A3961-05AB	15.84	21.78	23.76
A3961-06AB	19.80	25.74	27.72
A3961-07AB	23.76	29.70	31.68
A3961-08AB	27.72	33.66	35.64
A3961-09AB	31.68	37.62	39.60
A3961-10AB	35.64	41.58	43.56
A3961-11AB	39.60	45.54	47.52
A3961-12AB	43.56	49.50	51.48

SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer LCP, UL94V-0
PIN Brass Tin-plated

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENEAL TOLERANCE		制图 DRAWING	钱岳生		料号 PART NO.	A3961-NAB		版本 REV.	A
			X.±0.25	X.*±2'		2014、07、01	张名		VH	页次 SHEET		
			.X±0.20	.X*±1'	审核 CHECK	2014、07、03	张名	品名 TITLE	WAFER SMT TYPE			
			.XX±0.15	.XX*±0.5'	核准 APPROVAL	2014、07、05	张名	客户料号 CUTM. NO.	深圳市金航标电子有限公司			
			.XXX±0.10	.XXX*±0.5'	单位 UNITS	MM	比例 SCALE	1:1	KH-A3961-03AB		0755-28190160	
										www.kinghelm.com.cn		